



On-Premises Hardmount Washer-Extractors


SC020, SC030, SC040, SC060, SC080, SC100

Features

- Rigid mounted, normal spin, 100G factor
- Stainless steel top and front panel
- Stainless steel drum and tub
- High capacity water inlets
- Large drain valve
- Large door opening for easy loading & unloading
- Industry-leading flexible water level settings
- Patented Fill and Drain leak detection saves water
- Lighter, computer-optimized frame
- Designed to reduce sound and vibration levels
- Quantum™ Gold Control
 - easy to operate, easy to program
 - flexibility of 30 programmable cycles
- Quantum™ Standard Control
 - four cycle selections
 - two water levels and manual programming
 - maximum extraction speed of 100G factor

Options

- 200G factor (SC20-SC80)
- 165G factor (SC100)
- Stainless steel side panels
- Chrome door
- Steam heating version
- Electrical heating version



Quantum™ Gold Control



Quantum™ Standard Control



Robust Design



Large Drain Valve



Large Door Opening



Low Water Consumption

On-Premises Hardmount Washer-Extractors

Specifications


	SC020	SC030	SC040	SC060	SC080	SC100
Control Option	Gold/Standard	Gold/Standard	Gold/Standard	Gold/Standard	Gold/Standard	Gold/Standard
Capacity - [kg (lb)]	9.1 (20)	13.1 (30)	18.1 (40)	27.2 (60)	36.3 (80)	45.4 (100)
Overall Width - [mm (in)]	660 (26)	737 (29)	778 (30.6)	865 (34.1)	1054 (41.5)	1054 (41.5)
Overall Depth - [mm (in)]	784 (30.9)	896 (35.3)	1073 (42.3)	1135 (44.7)	1196 (47.1)	1298 (51.1)
Overall Height - [mm (in)]	1092 (43)	1143 (45)	1199 (47.2)	1267 (49.9)	1453 (57.2)	1453 (57.2)
Cylinder Diameter - [mm (in)]	533 (21)	610 (24)	668 (26.3)	762 (30)	914 (36)	914 (36)
Cylinder Depth - [mm (in)]	350 (13.8)	406 (16)	515 (20.3)	559 (22)	556 (21.9)	657 (25.9)
Cylinder Volume - [l (cu. ft.)]	79.3 (2.8)	119 (4.2)	178 (6.3)	255 (9.0)	365 (12.9)	430 (15.2)
Door Opening Size - [mm (in)]	295 (11.6)	363 (14.3)	414 (16.3)	414 (16.3)	470 (18.5)	470 (18.5)
Door Bottom to Floor - [mm (in)]	365 (14.4)	356 (14)	370 (14.6)	379 (14.9)	455 (17.9)	455 (17.9)
Water Inlet Connection - [mm (in)]	2 @ 19 (0.75)	2 @ 19 (0.75)	2 @ 19 (0.75)	4 @ 19 (0.75)	4 @ 19 (0.75)	4 @ 19 (0.75)
Drain Diameter - [mm (in)]	1 @ 76 (3)	1 @ 76 (3)	1 @ 76 (3)	1 @ 76 (3)	1 @ 76 (3)	1 @ 76 (3)
Drain Height to Floor - [mm (in)]	99 (3.9)	109 (4.3)	114 (4.5)	124 (4.9)	130 (5.1)	130 (5.1)
Total # of Speeds	6,9	6,9	6,9	6,9	6,9	6,9
CYLINDER SPEEDS - [RPM (G-FORCE)]						
Gentle	37 (0.4)	34 (0.4)	33 (0.4)	31 (0.4)	28 (0.4)	28 (0.4)
Wash	51 (0.8)	48 (0.8)	46 (0.8)	43 (0.8)	39 (0.8)	39 (0.8)
Distribution	92 (2.5)	86 (2.5)	82 (2.5)	77 (2.5)	70 (2.5)	70 (2.5)
Very Low	301 (27)	282 (27)	269 (27)	252 (27)	230 (27)	230 (27)
Low	518 (80)	485 (80)	464 (80)	434 (80)	396 (80)	396 (80)
Medium	579 (100)	542 (100)	518 (100)	485 (100)	443 (100)	443 (100)
High	648 (125)	606 (125)	579 (125)	542 (125)	495 (120)	495 (120)
Very High	710 (150)	664 (150)	635 (150)	594 (150)	542 (150)	542 (150)
Ultra High	819 (200)	766 (200)	733 (200)	686 (200)	626 (200)	568 (165)
VOLTAGE WIRES/ CIRCUIT BREAKER - FLA						
120/60/1	15.IX	15.XII	20 - 15	N/A	N/A	N/A
200-208/220-240/50/60/3/1/3	15 - 4 (1 Ph) 15 - 3 (3 Ph)	15 - 7 (1 Ph) 15 - 4 (3 Ph)	15 - 7 (1 Ph) 15 - 4 (3 Ph)	15 - 11 (1 Ph) 15 - 7 (3 Ph)	20 - 15 (1 Ph) 15 - 9 (3 Ph)	20 - 16 (1 Ph) 15 - 10 (3 Ph)
200-208/220- 240/50/60/3/3	30 - 22	30 - 22	50 - 41	50 - 41	80-73	80-74
440-480/50/60/3/3	15 - 2	15 - 3	15 - 3	15 - 4	15 - 6	15 - 6
380-415/50/60/3/3	15 - 4	15 - 4	15 - 5	15 - 6	15 - 8	15 - 8
SHIPPING DIMENSIONS APPROX. - [mm (in)]						
Width	711 (28)	800 (31.5)	826 (32.5)	953 (37.5)	1118 (44)	1118 (44)
Depth	859 (33.8)	973 (38.3)	1105 (43.5)	1191 (46.9)	1384 (54.5)	1486 (58.5)
Height	1255 (49.4)	1303 (51.3)	1361 (53.6)	1430 (56.3)	1514 (59.6)	1514 (59.5)
Motor Power Consumption - [kW (HP)]	0.75 (1)	0.75 (1)	1.5 (2)	2.2 (3)	3.7 (5)	3.7 (5)
Net Weight - [kg (lb)]	154 (340)	200 (440)	245 (540)	308 (680)	567 (1250)	581 (1280)
Shipping Weight - [kg (lb)]	172 (380)	218 (480)	263 (580)	327 (720)	590 (1300)	603 (1330)
Slat Crate Shipping Weight - [kg (lb)]	209 (460)	263 (580)	308 (680)	381 (840)	649 (1430)	662 (1460)
Agency Approvals	cETLus, CE	cETLus, CE	cETLus, CE	cETLus, CE	cETLus, CE	cETLus

On-Premises Hardmount Washer-Extractors

Dimensions

	Height	Width	Depth
SC020	1092	660	758
SC030	1143	737	897
SC040	1199	777	1074
SC060	1267	866	1135
SC080	1453	1054	1196
SC100	1453	1054	1298

All measurements in mm.

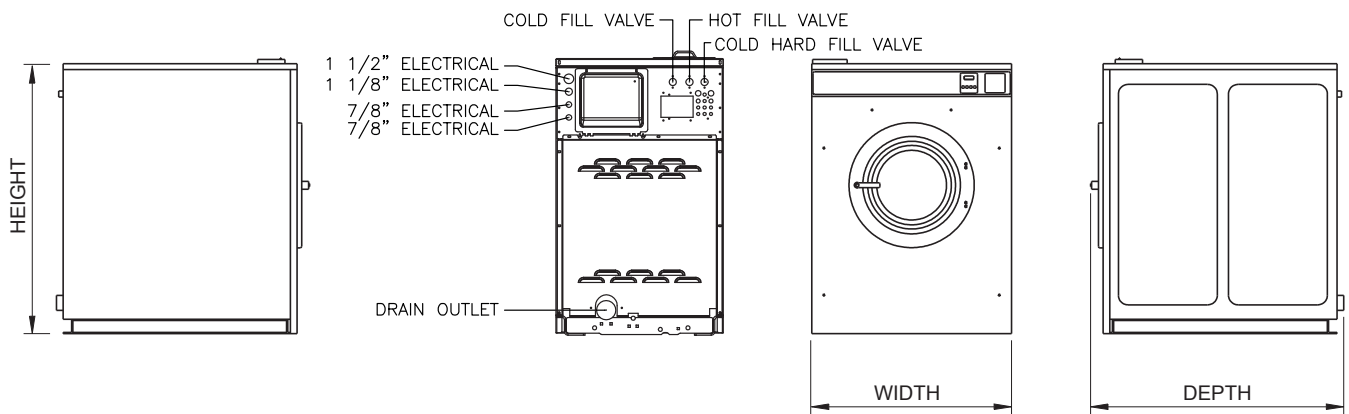

WESTERN AUSTRALIA

7/15 Walters Drive
Osbourne Park WA 6017
T: 08 9445 7744
enquiry@speedqueenwa.com.au

NEW SOUTH WALES & ACT

245 Rawson Street
Auburn NSW 2144
T: 02 9748 2155
enquiry@speedqueenlaundry.com.au

SOUTH AUSTRALIA & NT

385-387 Main North Road
Enfield SA 5085
T: 08 7095 0336
sa@speedqueenlaundry.com.au

QUEENSLAND

2/18 Gravel Pit Road
Darra QLD 4076
T: 07 3376 3869 *Home retail
qld@speedqueenlaundry.com.au